



HIGH PRODUCTION IMPACT CRUSHER

The Tesab 1125TR compact recirculating impact crusher combines mobility, power and new features to deliver the highest production across applications and materials.


The 1125TR combines the heavy duty impact crushing of the 1125T with the versatility of a recirculation system to combine the productivity of an 1125mm (44.3") impactor with screening efficiency – all in a compact and highly mobile footprint for maximum power and maneuverability. The radial conveyor can swing out for additional stockpiling. Like the 1125T, the crusher's design has ease of access in mind, with an excellent layout for operation, maintenance and service.

FEATURES & BENEFITS

Powerful 1050mm (41.3") diameter x 1125mm (44.3") wide Impactor

- Aggressive Blow Bar design with larger contact area for high capacity crushing
- Asymmetric Feeder integrated into single feeder/hopper configuration
- Tough-Flex® heavy duty conveyor belt delivers lasting performance
- Chamber Safety Arm for secure access to impact chamber
- Simplified Hydraulics and Direct Drive
 Crusher
- Efficient and simple operation
- 3660mm x 1525mm (12' x 5') Screenbox

IMPACT CRUSHER

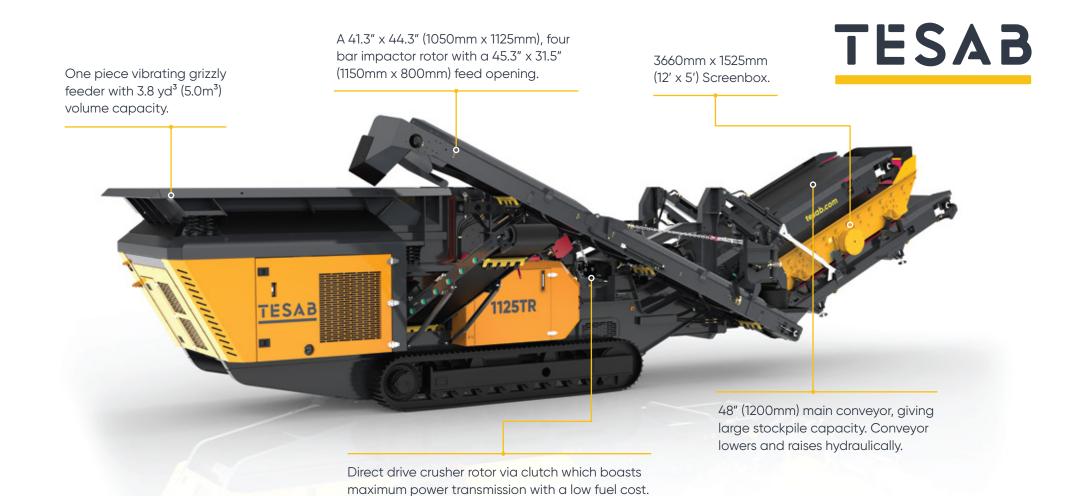

PERFORMANCE SPECIFICATION * Depending on application	Engine 375 Hp (280 kW)	Weight 90,390lb (41,000kg)	Width 44.3" (1125mm)	Diameter 41.3" (1050mm)	Production Rate*
DIMENSION SPECIFICATION*	TRANSPORT DIMENSIONS			CONVEYOR STOCKPILE HEIGHT	
	Height	Width	Length	Main	Side
tesab.com	10' 6" (3.2m)	9' 10" (3.0m)	51' 10" (15.798m)	12' 4" (3753mm)	9′ 1″ (2758mm)